

# FIRE RATED HATCHES

## SET BEAD



## FLANGED



Our Flanged and Set Bead Fire Rated Hatches are available in a range of sizes and are used where entry is required through a fire rated wall or ceiling to access electrical, plumbing or air conditioning equipment. Refer: GIB Fire Rated Systems and USG Fire Rated Grid Systems.

The frame is crafted from 1.0 bmt z275 steel sheet with robust punched folded tab system that ensures strength. The core is 30mm high performance maxilite fire rated board, face layer keruing plywood, inner layer MDF.

### FEATURES:


Pre-punched set bead edge trims for fast, simple fixing | Hettich German Concealed Hinges | Square Key Cam Lock | Tested in accordance with AS 1530.4



SET BEAD FIRE RATED HATCH	CODE
300 x 300mm	UH300-1HRSB
450 x 450mm	UH450-1HRSB
530 x 530mm	UH530-1HRSB
560 x 560mm	UH560-1HRSB
600 x 600mm	UH600-1HRSB


FLANGED FIRE RATED HATCH	CODE
300 x 300mm	UH300-1HRFL
450 x 450mm	UH450-1HRFL
530 x 530mm	UH530-1HRFL
560 x 560mm	UH560-1HRFL
600 x 600mm	UH600-1HRFL

### SET BEAD EDGE DETAIL

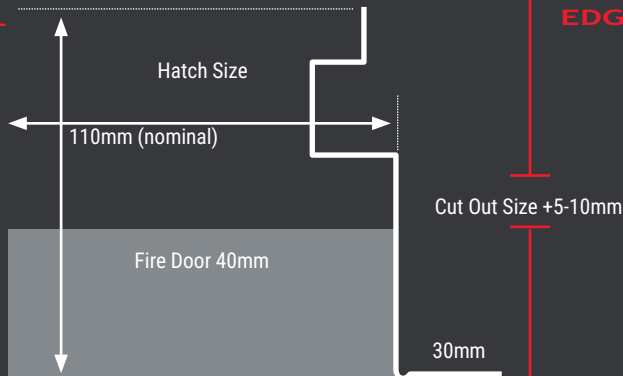

\*Not drawn to scale.

### FLANGE EDGE DETAIL

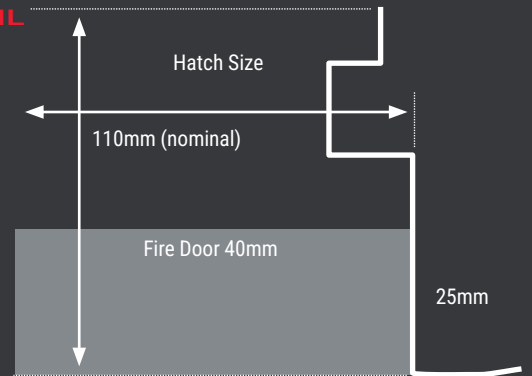

Fire Rated Hatches can be designed for custom sizes but cannot exceed and are limited to a maximum size. Specifications will change as sizes increase.



**UNIHATCH**

+64 21 866 672 | unihatch.co.nz

### UNIHATCH CUSTOM HATCHES

Unihatch specialise in custom size access panels manufactured to application request. Smoke Seals, Acoustic, Fire Rated and tile Hatches available.

Different lock options available: Keyed Alike | Budget Lock | Snap Lock



0800 POTTERS  
www.potters.co.nz  
info@potters.co.nz