



HERADESIGN[®]

Wood Wool Lay In Panels






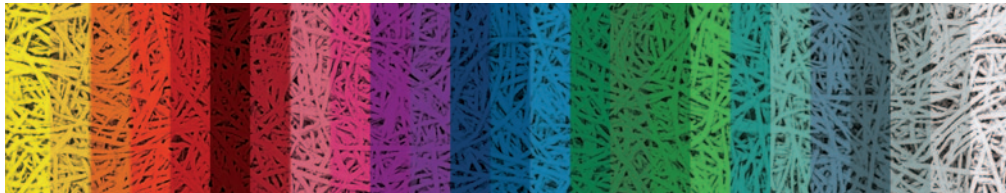












Features

- Available in two textures and a wide range of colors for flexible design
- Excellent sound absorption for a quieter, more comfortable space
- Durable and impact resistant#
- Sustainable natural ingredients for Green Star contribution
- RH90 humidity resistance with high dimensional accuracy

Application Areas

- Open Plan Offices
- Gymnasiums and recreational spaces
- Education
- Auditoriums & Multi-function facilities
- Restaurants & Hospitality
- Retail Spaces

Panel Options		Panel Size		BOARD (SK-04) Edge on all sides	TEGULAR BE 24 (SK-06) Edge on all sides																											
	Edge details			 24mm Grid	 24mm Grid																											
	Pattern - Superfine (Fibre width 1mm) Colour - Natural		600 x 600 x 25mm	HSFSK04060625	HSFSK06060625																											
			1200 x 600 x 25mm	HSFSK04120625	HSFSK06120625																											
	Pattern - Fine (Fibre width 2mm) Colour - Natural		600 x 600 x 25mm	HFSK04060625	HFSK06060625																											
			1200 x 600 x 25mm	HFSK04060625	HFSK06120625																											
	Suspension systems	PeakForm™ Steel options above, with AMF Blue Tongue® Aluminium upon request																														
	Colour options	<div><div><p>Surface Finish Factory applied acrylic paint</p><p>Visual Consideration Colour and pattern variation is common across panels due to the natural characteristics of wood</p></div></div>																														
	Sound absorption	<table><thead><tr><th>Pattern</th><th>NRC</th><th>125</th><th>250</th><th>500</th><th>1000</th><th>2000</th><th>4000</th><th>Hz</th></tr></thead><tbody><tr><td>Fine</td><td>0.70</td><td>0.30</td><td>0.70</td><td>0.65</td><td>0.55</td><td>0.75</td><td>0.85</td><td>α_p</td></tr><tr><td>Superfine</td><td>0.70</td><td>0.25</td><td>0.65</td><td>0.70</td><td>0.60</td><td>0.75</td><td>0.90</td><td>α_p</td></tr></tbody></table> <p>Notes:</p> <ol style="list-style-type: none">The absorption values above are tested with E-200 mounting (Total construction height of 200mm from bottom of ceiling to under side of slab)Tested sound absorption of up to NRC 1.00 with 40mm x 50kg/m³ acoustic infill and E-200 mountingContact your AMF office for further details, including test reports <div><p>• NRC = Fine • NRC = Superfine Octave Band centre frequency (Hz) Performance Per ASTM C423</p></div>				Pattern	NRC	125	250	500	1000	2000	4000	Hz	Fine	0.70	0.30	0.70	0.65	0.55	0.75	0.85	α _p	Superfine	0.70	0.25	0.65	0.70	0.60	0.75	0.90	α _p
Pattern	NRC	125	250	500	1000	2000	4000	Hz																								
Fine	0.70	0.30	0.70	0.65	0.55	0.75	0.85	α _p																								
Superfine	0.70	0.25	0.65	0.70	0.60	0.75	0.90	α _p																								
	Sound attenuation	EN ISO 354 & EN ISO 11654																														
	Fire resistance	Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 - Group 1, and ISO 5660 - Group 1 - S																														
	Thermal conductivity	Thermal Insulation (R- Value) 0.25 m²K/W (25mm)																														
	Humidity resistance	Humidity Resistance (RH90% at 5°C - 40°C) Refer to website for additional information																														
	Weight	Superfine: 12.6 kg/m² (25mm) Fine: 13.3 kg/m² (25mm)																														
	Indoor air quality	 A+	Cleanability / Durability			 Product Handling	 Cleanable	 Scratch Resistant	 Impact Resistant																							
Sustainability																																



POTTER
INTERIOR SYSTEMS

Distributed by

www.potters.co.nz

0800 POTTERS. | info@potters.co.nz

Auckland, Hamilton, Wellington + Christchurch

