


Available from



www.potters.co.nz
0800 POTTERS | info@potters.co.nz

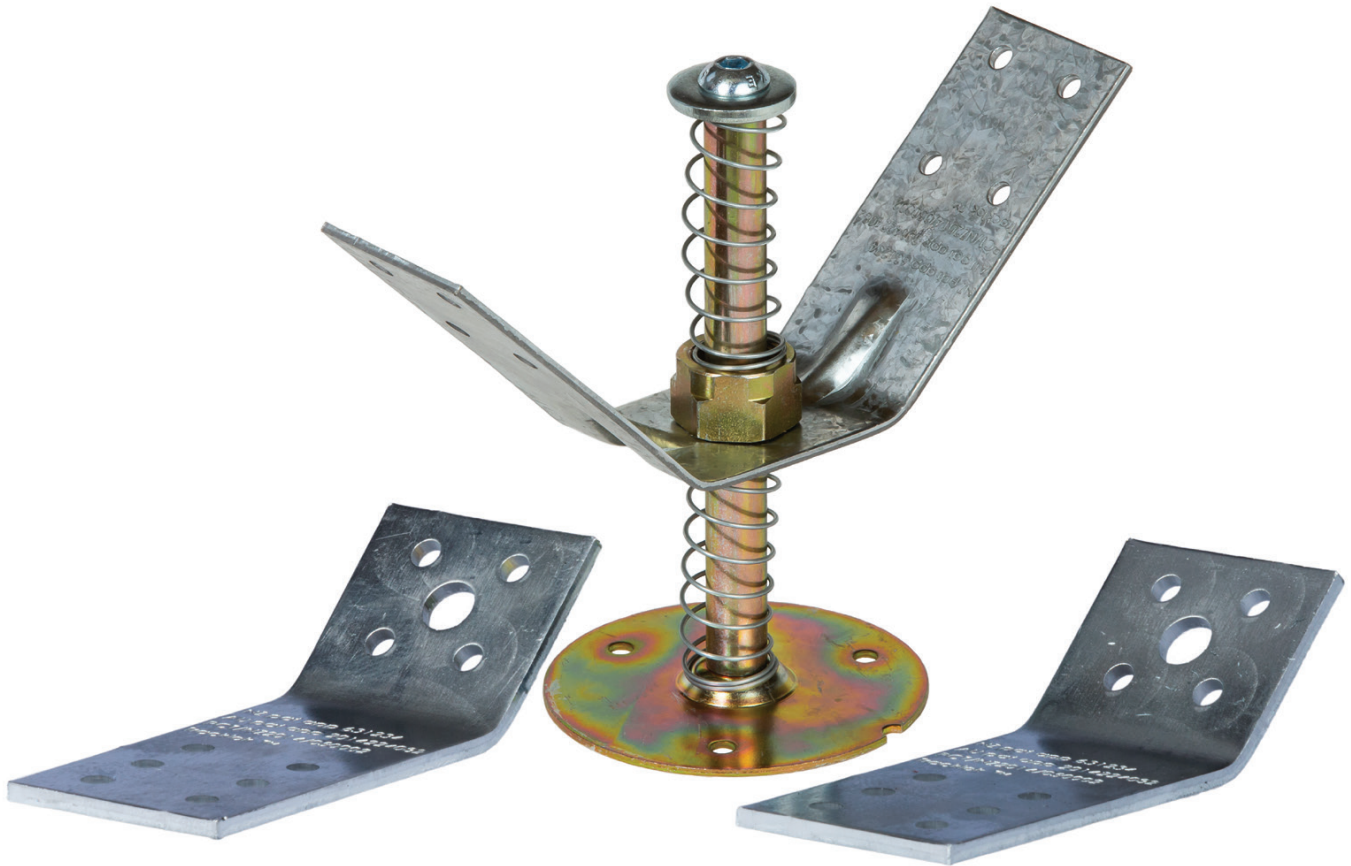

DEFLOK™ TIMBA

DEFLOK™ TIMBA provides a vertical movement allowance of + or - 35mm. Timber framed walls and timber top plates present a unique bracing challenge, with the inconsistency of this organic material. Utilised in IL2, IL3 and IL4 buildings.

COMPONENTS/ 1 x DEFLOK™ plus 2 x BC45 top connectors.

VARIATIONS/ Available in RETRO & VERT configurations if required.

STOCK CODE/ DFK-10T

