


Available from



www.potters.co.nz  
0800 POTTERS | info@potters.co.nz

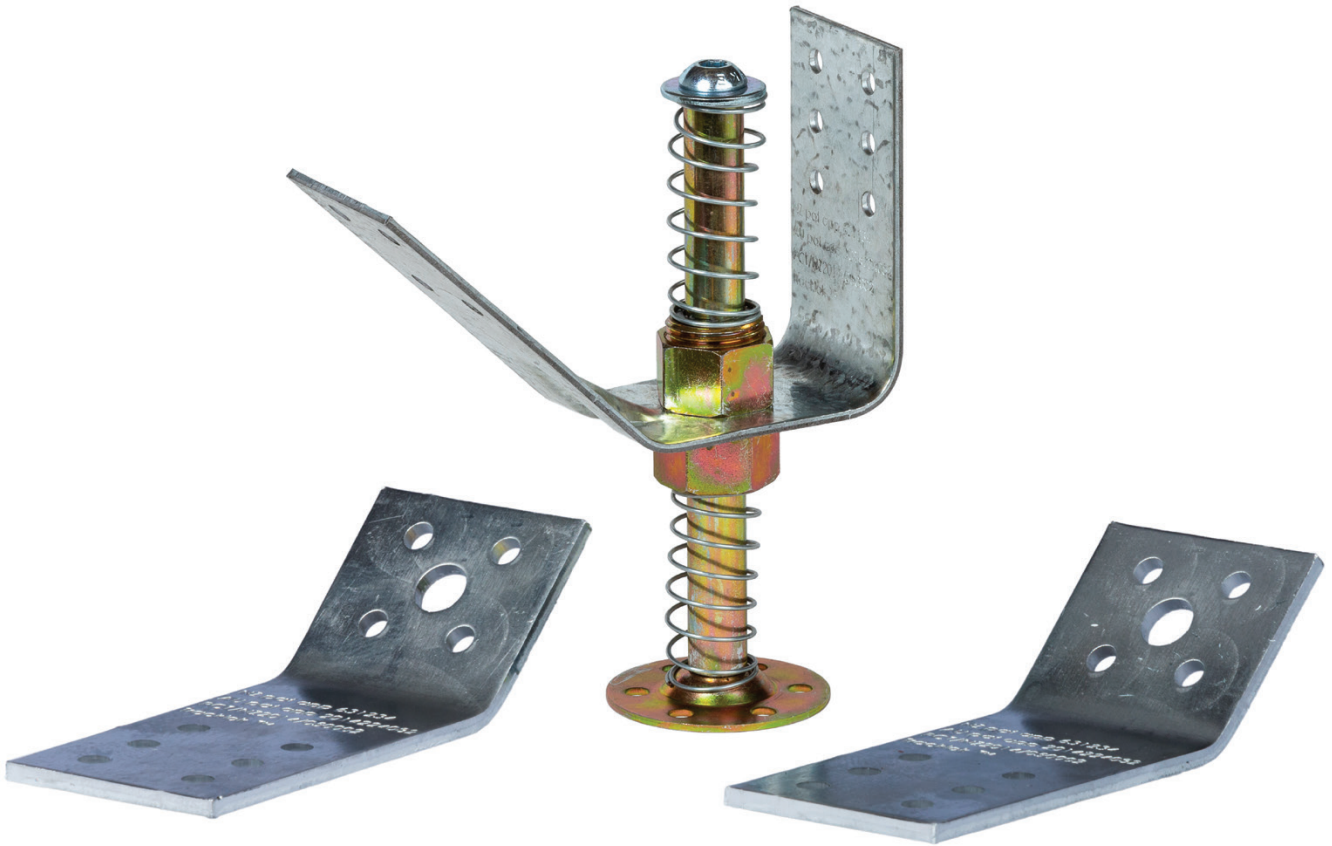

## DEFLOK™ VERT

---

Service clashes are inevitable and although the DEFLOK™ range provides flexibility with bracing angles from 30° to 60° there will always be some situations where this is not enough. DEFLOK™ VERT gives the installer a tool to use a vertical brace on one arm allowing for the ultimate in clash avoidance. Utilised in IL2, IL3 and IL4 buildings.

**COMPONENTS/** 1 x DEFLOK™ plus 2 x BC45 top connectors.

**VARIATIONS/** Available in TIMBA (DFK-10VT) and RETRO (DFK-10VR).

**STOCK CODE/** DFK-10VT and DFK-10VR

