




# Radar™ *ClimaPlus* High CAC, High NRC



Medium textured panel

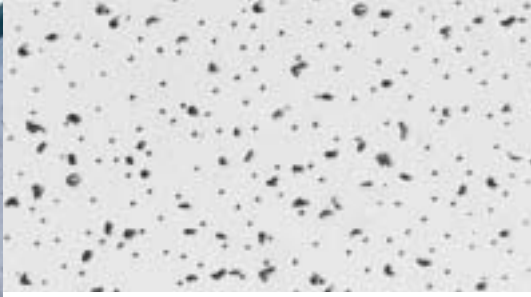

#### Features and Benefits

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Economical, all-purpose ceiling pattern in various sizes.
- High CAC minimum of 40 increases room-to-room speech privacy.
- High NRC .70 for greater sound control in open-plan areas.
- *CLIMA PLUS*™ 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without sag when used with USG's *DONN*® Brand Suspension Systems.
- *FIRECODE*™ formulation designed to meet life safety codes.

#### Applications

- Conference rooms
- Open office plans
- Privacy rooms

# Radar™ *ClimaPlus* High CAC, High NRC

Acoustical Ceilings

Technical Service 800 USG.4YOU  
Web Site [www.usg.com](http://www.usg.com)  
Samples/Literature 888 874.2450  
Samples/Literature Fax 888 874.2348  
Customer Service 800 950.3839  
Literature Number SC2290



UL Classified

	Edge	Panel Size	Class <sup>1</sup>	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	Recycled Content <sup>3</sup>	Panel Cost
RADAR™ High CAC Panel	(SQ)	2' x4' x5/8"		22310	.55	40	.84	White	A, C	50%	\$
RADAR High NRC Panels	(SQ)	2' x2' x3/4"		22111	.70	35	.84	White	A, B, C	50%	\$
		2' x4' x3/4"		22311	.70	35	.84	White	A, C	50%	\$
	(SLT)	2' x2' x3/4"		22121	.70	35	.84	White	D	50%	\$
		2' x2' x3/4"		22127	.70	35	.84	White	E, F, G	50%	\$

	A DONN® DX®/ DXL™	B CENTRICITEE™ DXLT	C DONN DXW™	D DONN DX/DXL	E CENTRICITEE DXLT	F FINELINE® 1/8	G FINELINE
<b>Grid Profile Options</b>							

**ASTM E1264 classification**  
Type III, Form 2, Pattern CD  
**ASTM E84 surface burning characteristics**  
Class A  
Flame spread: 25  
Smoke developed: 10

**Weight**  
1.14 lb./ft.<sup>2</sup>  
**Thermal resistance**  
R-1.68 (High CAC panels)  
R-2.13 (High NRC panels)

**Maximum backloading**  
See Warranty for details.  
**Maintenance**  
Panels can be cleaned easily with a soft brush or vacuum.

**Footnotes**  
1. Fire-rated items: See UL design details.  
2. LR values are shown as averages.  
3. For details, see the Recycled Content selector.

**SAFETY FIRST!**  
Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by  
USG Interiors, Inc.  
125 South Franklin Street  
Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company:  
CENTRICITEE, CLIMAPLUS, DONN, DX, DXL, DXW, FINELINE, FIRECODE, RADAR, USG.

SC2290/rev. 6-04  
© 2004, USG Interiors, Inc.  
Printed in U.S.A.